

AT-FA-2000H-2

Addressable Master Control Fire Alarm




AT-FA-2000H-2 The Addressable Master Control Fire Alarm are new designed product of Atsontech. The Linkage control function allows to be used with other products of Atsontech to form any integrated alarm linkage control system with flexible configuration, especially suitable for the application of small and medium-sized fire alarm and fire linkage integrated control system.

- **484 Addresses Capacity**
- **Graphic color display, intuitive operation**
- **Flexible modular structure, multiple function**

Technical Specification

Main Power	220V AC
Backup Battery	2 x 12V/5Ah
Loop NO.	Up to 2 Loops
Loop Current	Total max. 700mA
Total Loop Capacity	484 addresses
Output Interface	Total max. 300mA Alarm: Max 24V/150mA 24V: Max. 24V/300mA
IP Rating	IP30
Operating Temperature	-10°C - +50°C 0-95%RH, non-condensing
Special proof	Phosphine corrosion proof for 2G/4G
Networking method	CAN, Fiber, TCP/IP
Dimension	500mm*380mm*80mm

Configuration Options

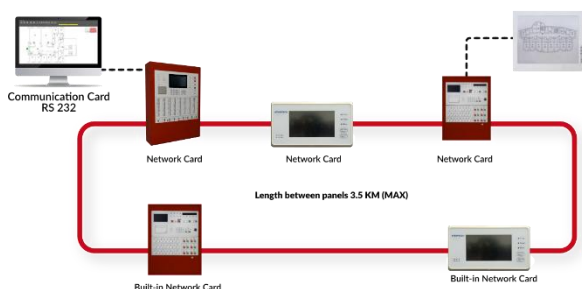

- Commissioning through panel or PC
- RS232, RS485 port for connection with Graphic Monitoring Control or Networking
- CAN/Fiber TCP/IP Networking