

AT-PA-VC305RL

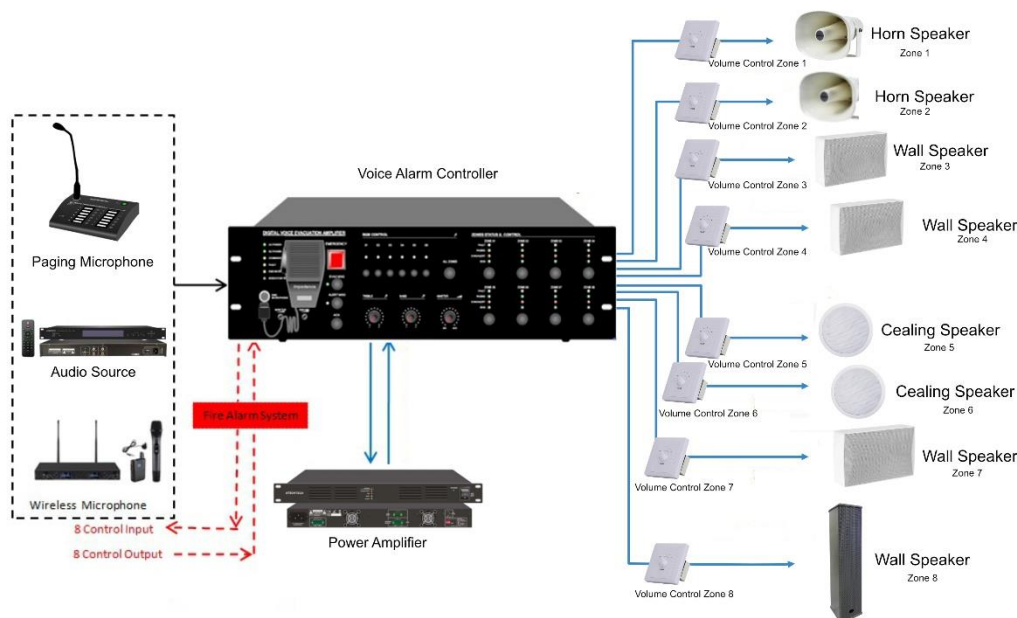
Volume Control 30W

DESCRIPTION

AT-PA-VC305RL is designed to deliver efficient and reliable audio level adjustment for public address and background music system. Featuring multiple attenuation steps and a built-in transformer, it ensures balanced and consistent sound output across speaker lines. The integrated 24V relay allows automatic override during emergency situations, ensuring important announcements remain clearly audible.

**FEATURES**

- PA (Public Address) system use volume control with 24V relay
- Background music system with voice alarm use attenuator with 24V relay
- The volume controller is used to adjust the loudspeakers output in the room
- Built-in transformer to control the PA 100V line loudspeaker.
- With 4 levels of volume attenuator and one position of off
- The volume controller is used to keep same speaker line
- The volume controller with 24V relay working principle

SYSTEM CONNECTION DIAGRAM

PUBLIC ADDRESS SYSTEM

TECHNICAL SPECIFICATION

<i>Description</i>	100V Volume Cpntrlwith Relay
<i>Rated Output</i>	30W
<i>24V relay</i>	With 24V relay
<i>Line Input</i>	100V or 70V
<i>Volume Step</i>	5 Steps
<i>Attenuation Per Step</i>	3dB
<i>Total Attenuation</i>	33dB
<i>Material</i>	UV-protected ABS
<i>Finish</i>	White
<i>Mounting Way</i>	Surface mount or in-wall mount
<i>Depth</i>	60mm
<i>Plate Dimension</i>	86(W) x 86 (D)mm
<i>Description</i>	100V Volume Cpntrlwith Relay
<i>Rated Output</i>	30W
<i>24V relay</i>	With 24V relay