

AT-PA-AM6Z120BG7S


Public Address Amplifier



AT-PA-AM6Z120BG7S is the 6 zone mixer Amplifier with MP3, FM tuner & Bluetooth, its rated power output 120W, it is ideal for school, super market, bank, hotel BGM and speech use. It is all in one solution with two sources, pre amplifier and mixer power amplifier into one 19"2U height unit, which is economy but of high reliable performance.

- Public address (PA) 6 zone commercial mixer power amplifier
- 6 zone speaker output of 100V
- Six zone speaker output with independent volume control
- Built-in MP3 player by USB & SD, FM tuner & Bluetooth
- Four microphone inputs, Mic 1 (63mm) and Mic/Line input 2-4 (XLR)
- EMC input on rear panel with highest priority by RCA
- AC and DC power, protection, clip six zone status indicator and output level meters
- Overload, short circuit and high temp protection

System Connection Diagram

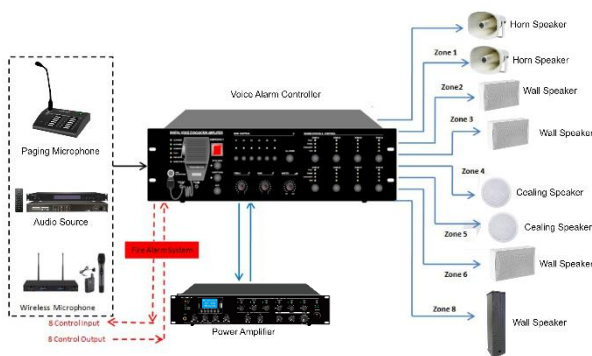

Technical Specification

Description	6 Zone Mixer Amplifier with Mp3/FM/BT
Rated Power Output	120W
Speaker Output	100V of 6 Zone & Single Zone of 100V/70V/4-16 Ohm
Input	Mic 1-4: 2.5mV, Line 1-2 : 205mV ; 250mV
Frequency Response	80-16KHz
THD	<0.1%
S/N Ratio	>70dB
Protection	High temp, short circuit, clip & overload protection
Power Supply	AC230V or AC100V, 50-60Hz
Power Consumption	200W
Dimension	438(W)X405(D)X88(H)mm
Weight	11.5 Kg