


AT-PA-IPMIC7

IP PA Network Remote Microphone

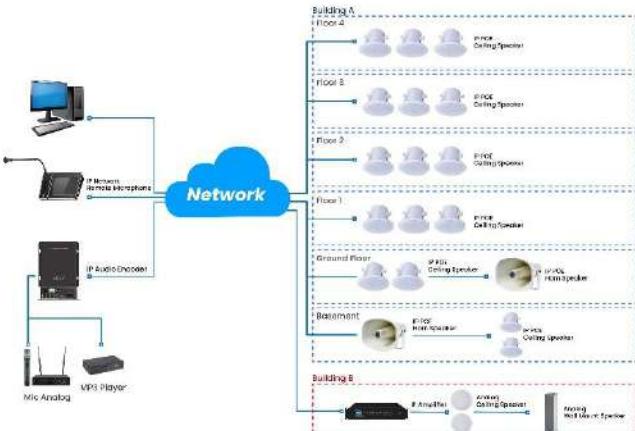

IP PA System IP Network Remote Microphone (Touch Screen) AT-PA-IPMIC7 is one IP based network remote paging Microphone for IP network audio system, through which live speech, zone paging and pre-recorded voice alarm could be operated to different zones over IP network. This paging microphone could be installed to anywhere of the LAN system.

System Connection Diagram

- Touch Screen IP Remote Microphone for IP Public Address System
- Full duplex two way communication between different remote microphones
- 7 inch LCD to control up to 6,000 speaker zones
- Programmable swift key for automatic control
- Built-in 5W full-range monitor speakers with clear voice message
- Embed PC technology, built-in DSP & high speed industrial chip to ensure start time less than 1 second

Technical Specification

Description	IP Network Remote Microphone (Touch Screen)
Communication Protocol	TCP/IP, UDP, IGMP, ARP, UDP
Audio Format	MP3/MP2
Sampling Rate	8KHz – 48KHz
Transmission Speed	10M/100Mbps
Frequency Response	20Hz ~ 16KHz (+1dB, -3dB)
T.H.D.	≤0.3%
S/N Ratio	>70dB
Connector	One RJ45 port, one line input, one line output, one USB input 3.5mm monitor out, control input and two control outputs
Working temp	-5° C ~ +40° C
Humidity	10% ~ 90%
Power Consumption	≤10W
Power Supply	12V DC
Dimensions	250x163x42mm
Weight	2.2Kg