

## AT-FA-JP9911

Jack Phone

### DESCRIPTION

**AT-FA-JP9911** is a telephone jack socket, normally located at various places. Common installation positioning is in the landing levels of all core stairwells and escape routes, although the exact positioning is the responsibility of the project designer.

The person on site with a mobile handset may just plug & talk to the control center. The unit should be mounted in a suitable and dry location at about 1.5m from finished floor level



### FEATURES

- No need Addressing
- The person on site with a mobile handset may just plug & talk to the control center
- Jack Diameter 6mm

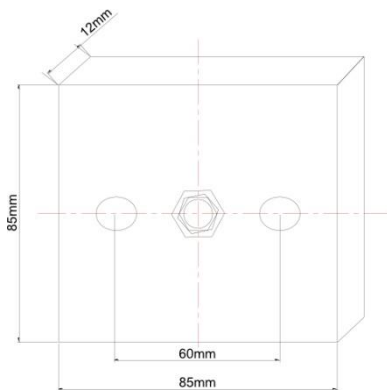


Fig. 1

### INSTALLATION

Structure schematic is shown as Fig.1 and Fig.2. The jack pocket can be installed with standard electronic rack box, which mounting hole distance is 60mm.

Connect the cable to the terminals. There is no need addressing.

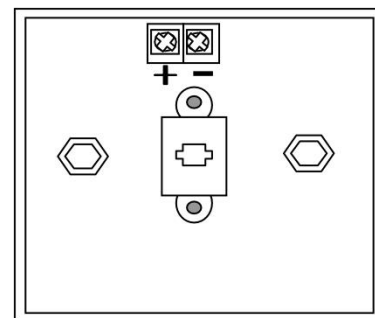


Fig. 2

### TECHNICAL SPECIFICATION

Jack Diameter	6mm
Operating Environment	Temperature -10°C to 50°C Humidity ≤95%, non condensing
Diameter	85x85x12 (mm)